



DIELECTRIC RESONATOR OSCILLATORS	PmT DRO-7000 Series
<b>FEATURES:</b> <ul style="list-style-type: none"> <li>■ Customer Specified Frequency</li> <li>■ Packaged MESFET or BJT devices</li> <li>■ Low Phase Noise</li> <li>■ Low Microphonics</li> <li>■ High Vibration Operation</li> <li>■ SMT Fabrication</li> <li>■ Internal Voltage Regulation</li> </ul>	


Parameters	Specifications	
Model	7000 Series	7100 Series
Frequency Range	17 to 24 GHz	17 to 24 GHz
<b>Tuning</b>	<b>Mechanical</b>	<b>Electrical</b>
Tuning Range, Min.	±10 MHz	±5 MHz
Power Output, Min.	13 dBm	13 dBm
Power Output, Max	3 dB	3 dB
Frequency Accuracy, Max.	0.1%	0.1%
Operating Temperature	-50 to +100 °C	-50 to +100 °C
Storage Temperature	-55 to +125 °C	-55 to +125 °C
Temperature Stability, Max.	±0.05%	±0.05%
Harmonics, Below Carrier, Max.	-20 dBc	-20 dBc
Spurious Output Below Carrier, Max.	-60 dBc	-60 dBc
Phase Noise <sup>1</sup>		
10 KHz offset	-80 dBc/Hz	-80 dBc/Hz
100 KHz offset	-95 dBc/Hz	-95 dBc/Hz
Input Voltage	+15±0.5 VDC	+15±0.5 VDC
Input Current, Max.	75 mA	75 mA
Connector	SMA Female standard	SMA Female standard
Weight, Max.	3.0 oz.	3.0 oz.
Size	See Outline; 19 GHz shown	See Outline; 19 GHz shown
Order Information	PmT-DRO-7000 Series- Frequency (GHz)	PmT-DRO-7100 Series- Frequency (GHz)




<sup>1</sup>See Phase Noise Plots in Technical Documents.




<p>DIELECTRIC RESONATOR OSCILLATORS</p>	<p>PmT DRO-7000 Series</p>
<p><b>FEATURES:</b></p> <ul style="list-style-type: none"><li>■ Customer Specified Frequency</li><li>■ Packaged MESFET or BJT devices</li><li>■ Low Phase Noise</li><li>■ Low Microphonics</li><li>■ High Vibration Operation</li><li>■ SMT Fabrication</li><li>■ Internal Voltage Regulation</li></ul>	

Block Diagram:

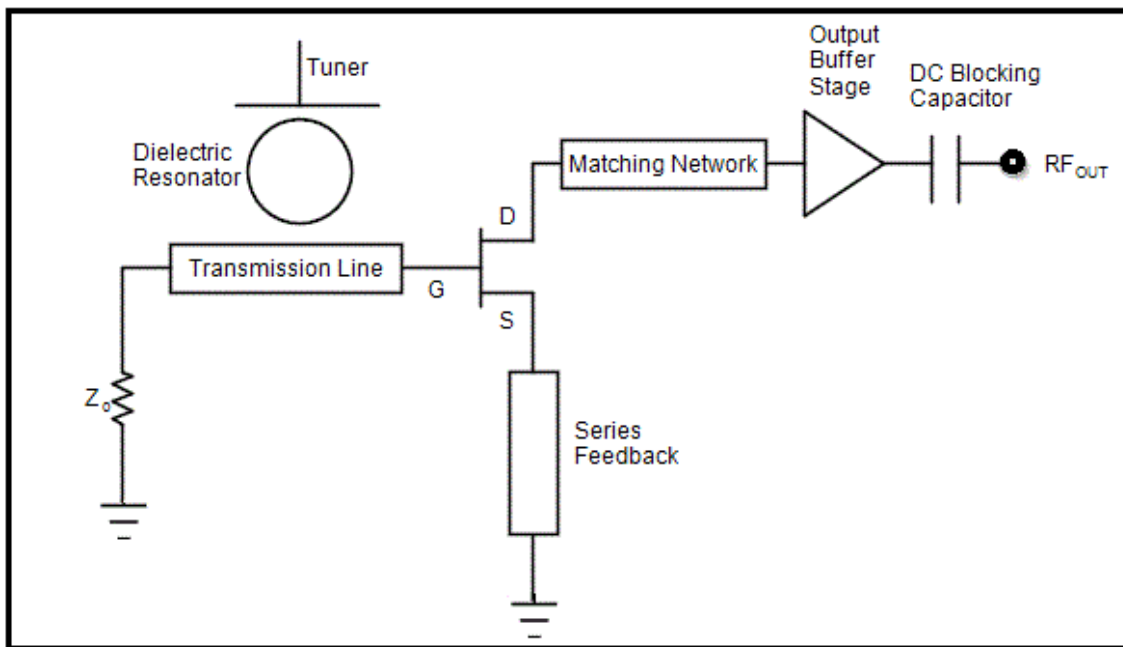

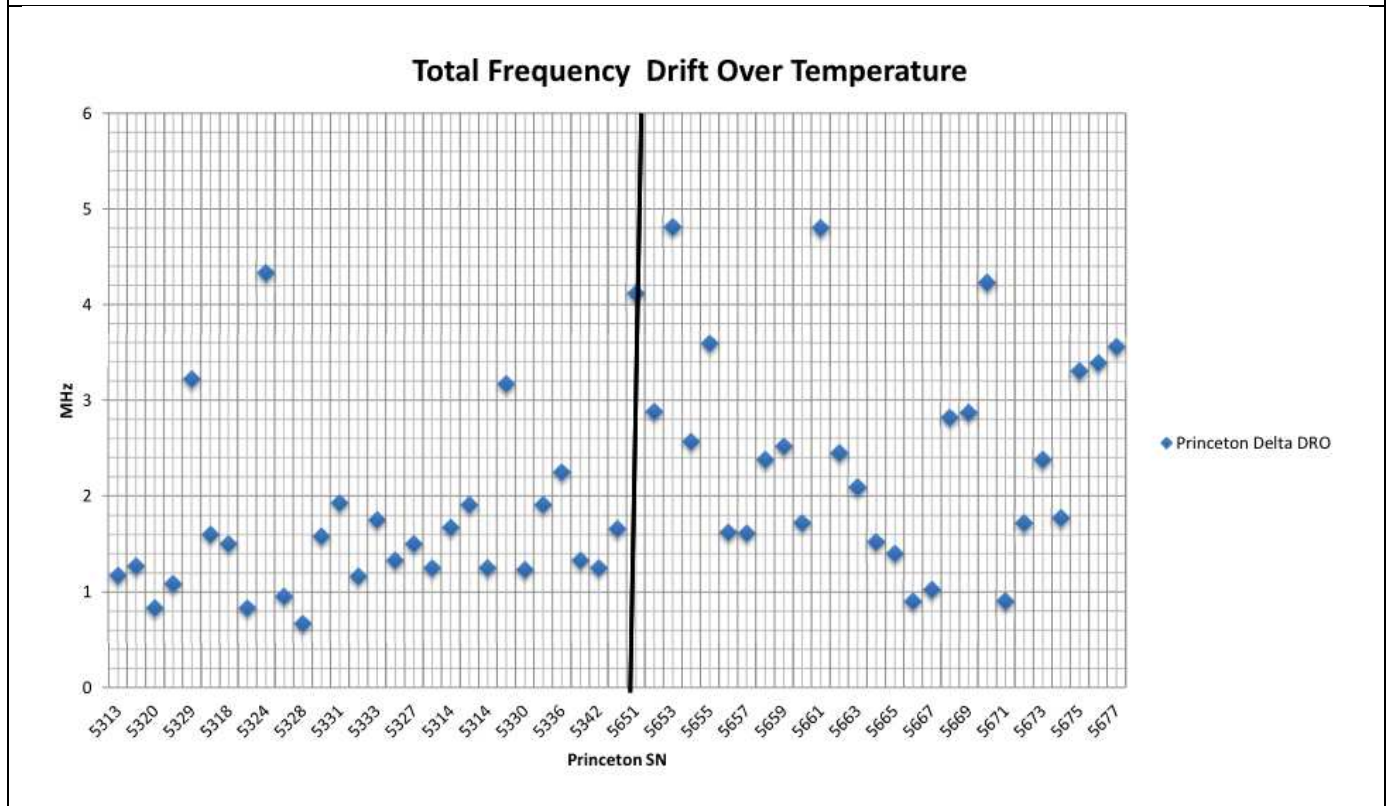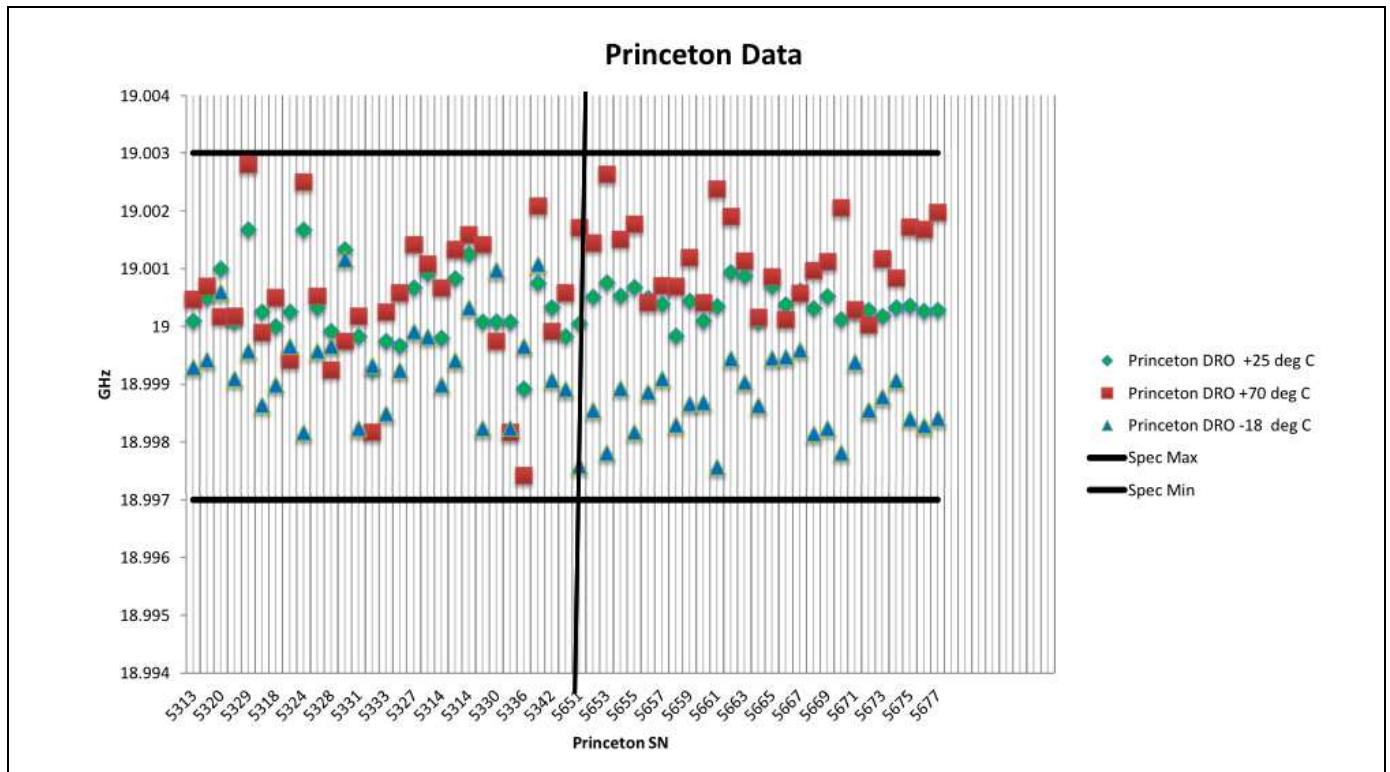



Package:

